DH-K809A[illegible]ABS[illegible]

[illegible]/[illegible]

1.Jog / Non-Latched[illegible]/[illegible]“[illegible]/[illegible]”[illegible]

2.[illegible]/[illegible]/[illegible]/[illegible]

3.[illegible]/[illegible]/[illegible]/[illegible]2[illegible]

4[illegible]5s[illegible]10s[illegible]15s[illegible]

Dimensions	66Lx45Wx30H(mm)
Finished for Shell	Plastic, Abrasion Resistant
Output Contact	NC/NO/COM
Input	12VDC (24VDC by Optional)
Current	8mA
Transmitting Freq	433.92MHZ
Transmitting Power	10mW
Suitable for	access control
Transmitting Distance	≥70m(in open area)
Finished for Shell	Plastic, Abrasion Resistant
Capable	30 Transmitter
Weight	0.2kg

□□□
1.□□□□□DC10-14V
2.□□□□ <5MA
3.RF□□□315MHz□433MHZ
4.RF□□□□□□□□□□□
5□□□□□□□> 90dBm
6.□□□□□> 100□□□□□□□□□
7□□□□□□MCU□□□□
8.□□□□□□□□□50□
9□□□□□□□□□□□□□□□□
10.□□□1CH

11.多种工作模式：（点动/非锁，互锁/自锁，自锁/自锁，延时关闭）
12，接线方式：固定接线端子
13.工作电压：DC12V
14.输出电流：10A
15.额定负载：10A 250VAC / 10A 125VAC
10A 30VDC / 10A 28VDC
16.输出：常开，普通，常闭
17.尺寸：3.5cm * 3cm * 1.6cm
应用：遥控门控制，制动；远程无钥匙进入（RKE）；无线控制窗帘装置；无线安全系统；无线工业控制无线停车场障碍

Trunk

Garage door

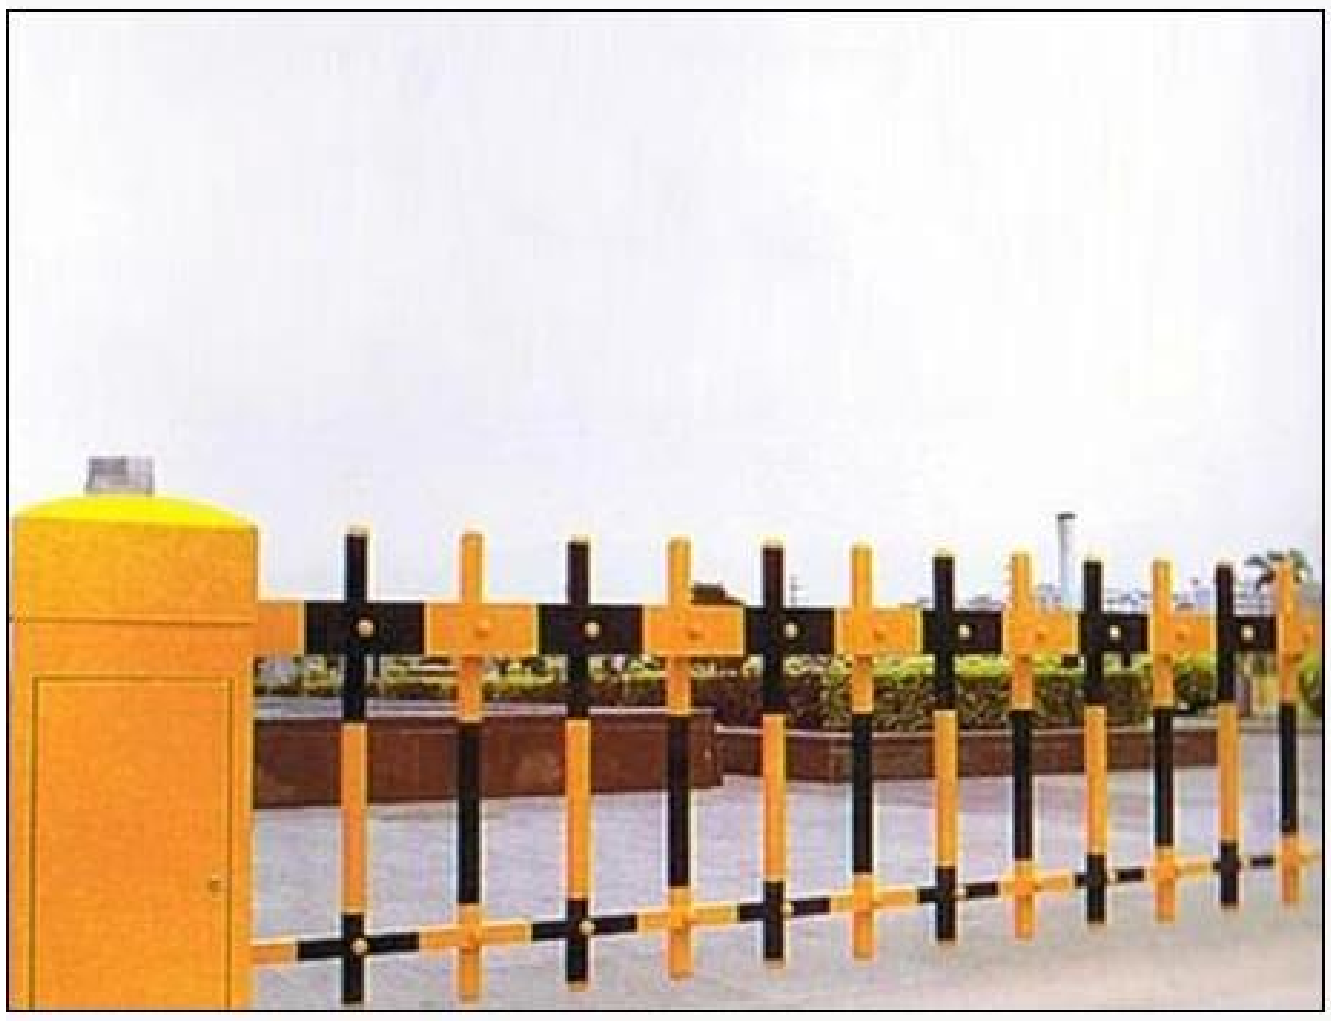

Braking door

Induction auto doors

Electric telescopic door

□□□

1.Jog□□LED□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ LED□

烁5次并再次熄灭。 3S延迟后，LED灯标记学习成功，系统自动退出学习状态。
2，自锁：按学习按钮，然后松开，再按2次，系统自动设置为自锁模式，稍等片刻，LED熄灭，进入学习状态，按遥控器，LED闪烁关闭5次。 3S延迟后，LED灯学
习成功。
3.互锁：按学习按钮，然后松开，连续按3次，系统设置为互锁模式。
4，延时：按下遥控器上的继电器，松开遥控器并开始计时，5s，10s，15s后将自动关闭继电器