

# 32x8000users RFID




尺寸	228mm×144mm×22mm
容量	512K
WG	
通道数	32
读卡距离	32
接口	S3 128
协议	TCP / IP
读卡速度	16
读卡方式	Card + PW double card PW
D	1-65535
频率	1-255
读卡速度	2
读卡距离	D
读卡速度	1-65535
读卡距离	
容量	8000
容量	20000
容量	10000
容量	
容量	
容量	

TCP / IP  
 8000 20000 10000  
 32 32

3路128路128路  
16路+ PW PW  
485 TCP / IP



Wiring diagram

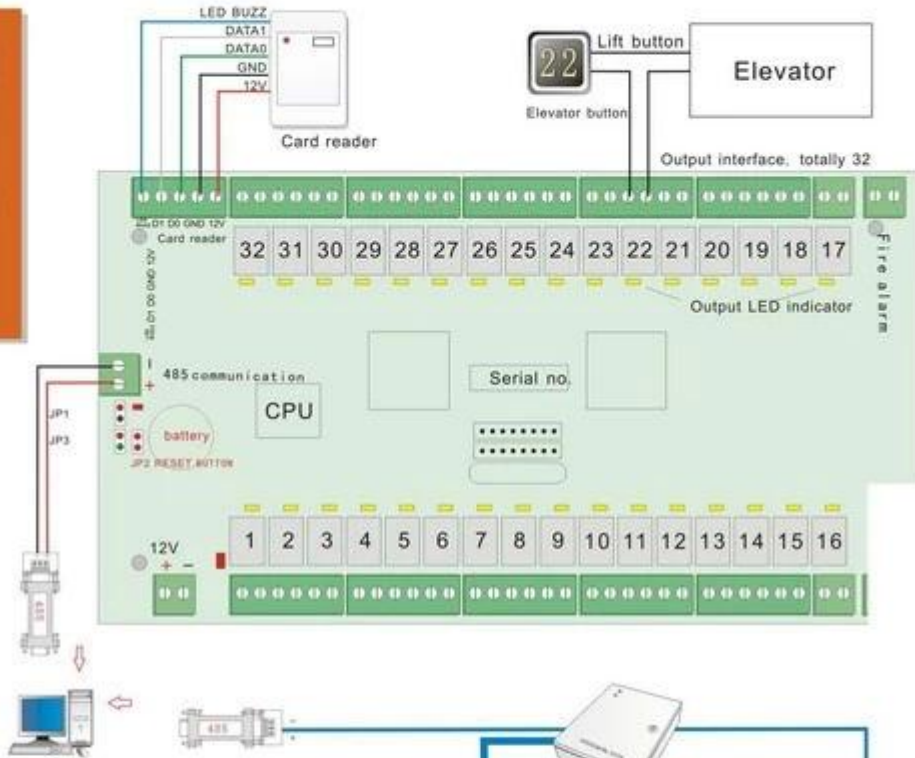


Software features

- Support 485 and TCP/IP controllers, all of our access controllers use one software.
- Have all of functions that professional access control software possesses.
- Multi-language is possible. Customer can add new language easily.
- Real-time color show each point's status.
- Support records showing in full screen, and show user photo. And support sound.
- Support two database: MS Access and MS SQL server, MS Access as default.
- Support the authority on access controller, lift controller, locker controller under the same operation.
- Support operations through software.
- Support NO or NC status of random defined outputs.
- Start up software time synchronization, and just click mouse two times to update controllers.





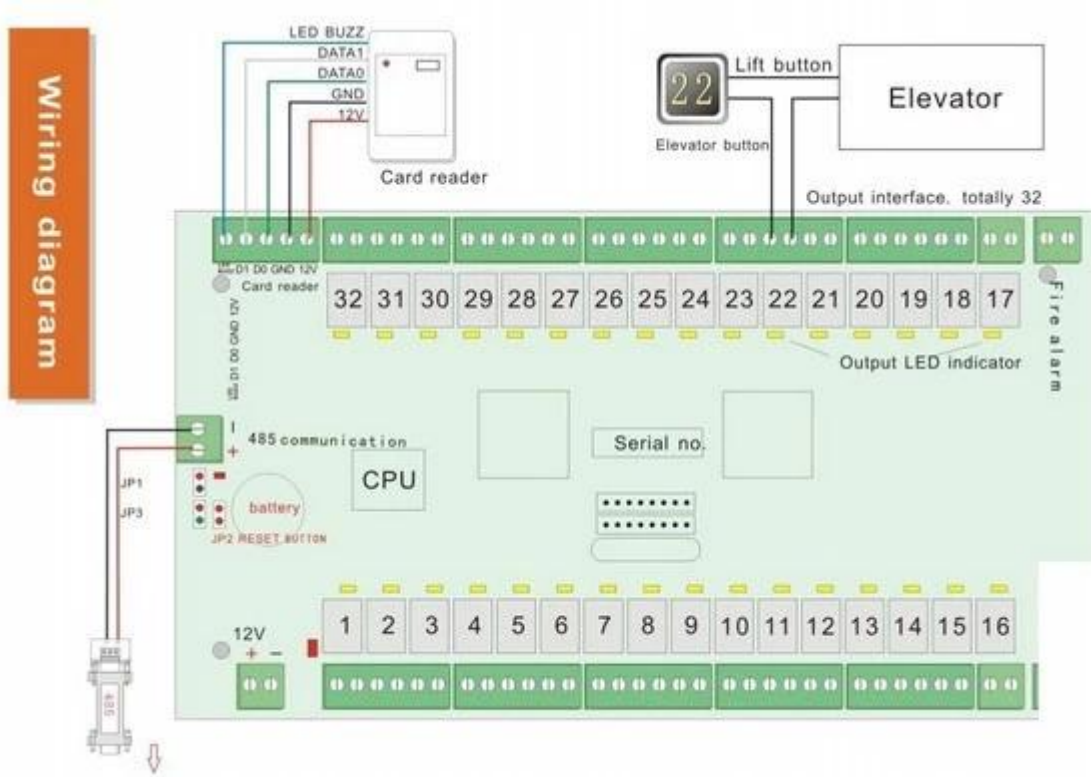

**OUR CERTIFICATE**



**FACTORY / WORKSHOP / EXHIBITION**



**CONTACT US**



## **Sincerely for your service**

**You are welcome to come to consult**

**Contact:** Winnie Liang

**Cellphone/Wechat/Whatsapp:** +86 13602510930

**Skype:** udohow1

**Email:** info@udohow.com

**Web:** www.udohow.com

**Click Back Home**