



Pag-andar:

A. automatic pagsasara;

Ang bilis ng B. closing ay maaaring maiakma;

Ang mas malapit na pintuan ay may function ng pananatili.

## PRODUCT DETAILS SHOW

### 1 STRETCHABLE MECHANIC ARM

Mechanic Arm can be adjustable, stretchable, even when doorframe and door are not in same plane, it is still able to be installed, satisfying your multiple requirements




### 2 FASTENED RIVETS

Fastening Rivets assure stability in connection, effective solution in usage and safety, premium performance in wearproof

### 3 MAIN BODY

Special Structure Design For Components, Multi-Step Processes For Manufacturing, Pass 100000 Times Test, Premium & Durable

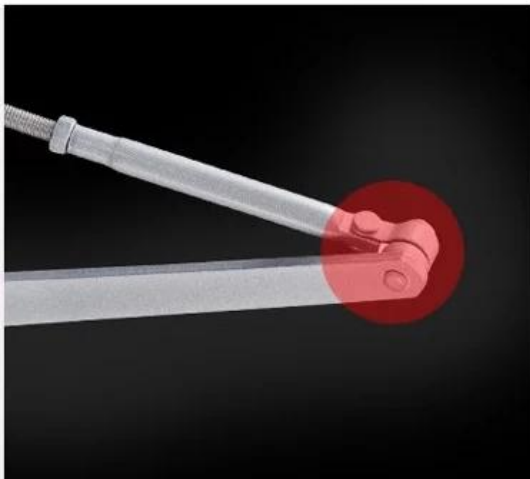

### 4 POLE & BEARING

Special Structure Design For Components, Multi-Step Processes For Manufacturing, Pass 100000 Times Test, Premium & Durable

Kalamangan:

Ang palapit ng pintuan ay naka-install sa tuktok ng dahon ng pinto na may solong pagbubukas, ay naaangkop sa kahoy na pinto na bakal na pintuan at pintuan ng apoy.

Naaangkop sa iisang pintuan na may pinakamataas na lapad ng pintuan na 950mm at bigat ng pintuan na 85-100kg.

01

## CONFIRM TYPE OF DOOR BEFORE INSTALLATION



### SUITABLE FOR THESE DOORS

Wooden Door, Aluminum Door, Stainless Steel Door, Iron Door,  
Fireproof Door, Anti-Theft Door, Hollow Metal Door etc.

Could be installed on the right or left



Fireproof Door


Wooden Door

Metal Door

Anti-Theft Door


02

## ASSURE DOOR AND DOORFRAME ARE ON THE SAME PLANE

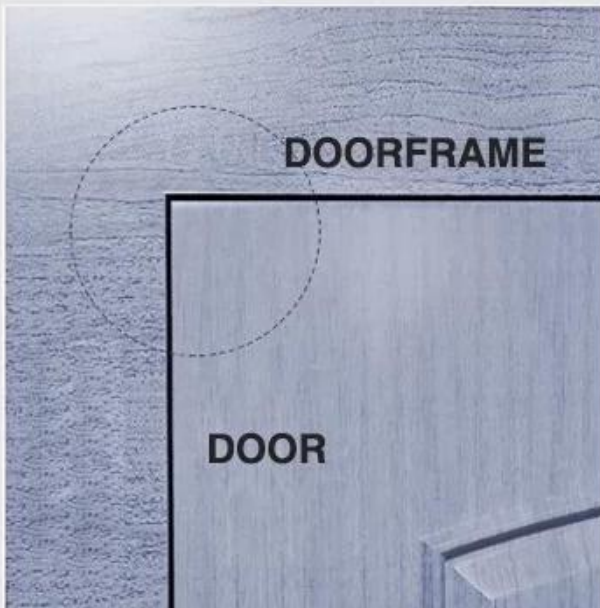

### DOOR AND DOORFRAME ARE ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe on the same plane, then door closer will work

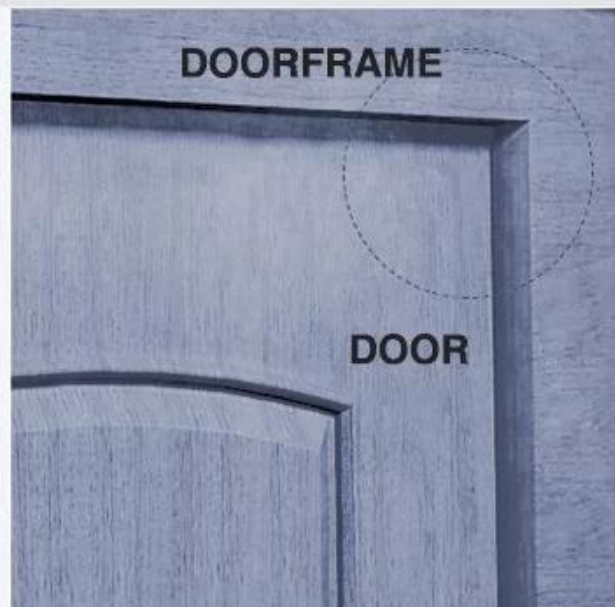

### DOOR AND DOORFRAME ARE NOT ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe on the same plane, then door closer will work