

DH7002 Access Control kit with Power supply 5A is a device combined the most advanced chip technology and mechanics of communication. It can control 2 doors with 4 readers, bidirectional network control system. For each door, user can connect the controller with one reader for entry and one button for exit; or connect one reader for entry and one reader for exit to realize safer door access control request. Whenever required, the data stored in the controllers is transferred to the computer and activity reports are printed. Each controller works independently and keeps its own database.



| parameter                 | Door control panel  | Multiport Control Panel (2)  | Multiport Control Panel (4)   |
|---------------------------|---|--|---|
| model                     | DH-7001   | <b>DH-7002</b>   | DH-7004   |
| communication             | Adaptive TCP / IP 10M / 100M  | Adaptive TCP / IP 10M / 100M   | Adaptive TCP / IP 10M / 100M  |
| description               | Control 1 door, enter and exit the door by sliding the card, to enter by sliding the card and exit the door with the button | Control 2 doors, enter and exit the door by sliding the tab, enter the card by sliding and exit the door with the button | Control 4 doors, enter the door by sliding the card and exit the door with the button |
| PCB dimensions            | 160 106mm *   | 160 106mm *  | 160 106mm *   |
| Box size                  | 273 * 228 * 65mm  |  |   |
| Power supply              | 12VDC 4-7A  |  |   |
| Power consumption circuit | Less than 100 mA  |  |   |
| Reader input format       | Wiegand 26 (All card readers with compatible protocol. Like Motorola, HID, EM, Mifare one, etc.)                            |  |   |
| Readership                | 2 pieces  | 4 pieces   | 4 pieces  |
| Checked from the door     | 1 door  | 2 doors  | 4 doors   |

## Features:

Support offline work, TCP / IP communication; allow direct connection to the computer through the network cable. Support LAN, remote control through PC software.

Compared to the standard standalone access controller, this device separates the reader and controller individual parts to make a greater security request from the client.

This device is compatible with all RF readers available with any type of standard Wiegand communication format available on the market.

Incorrect connection of the reader or data cable will not destroy the device or open the door illegally.

Inhibition of the effect of static electricity and overvoltage by input interference and feedback from electronic locks.

All-in-one card management system: normal shift and shift management system; fixed rations management system; meeting attendance management system; online patrol management system and security alarm management system.



Access Control Power supply

BEDDING COTTON FABRIC IS, IT SEEMS TO BE AS SOFT T-SHIRT. TWANGJU USING ANCIENT WEAVING TECHNIQUES FROM EVERY DETAIL TO ENSURE SUPERIOR QUALITY. PEOPLE LYING THERE SLEEPING ON A COMFORTABLE FEEL SPECIAL.





**Metal shell**  
High-quality materials



**Intelligent circuit**  
Charging overload protection





**Delay adjustment**

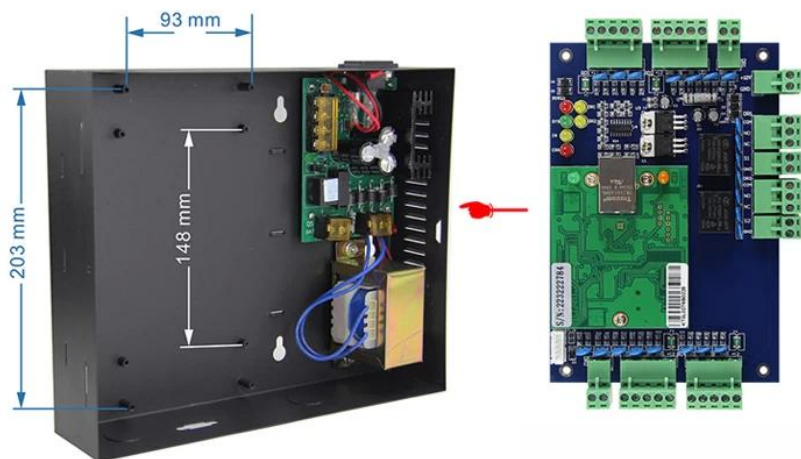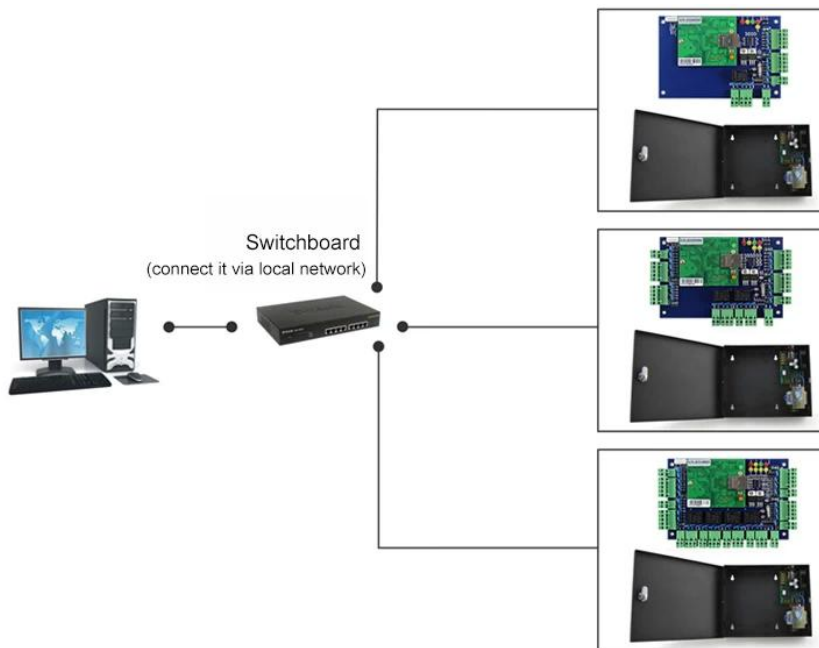


Kindly remind:

All network control board must configure with access power supply.  
1 board for 1 power supply

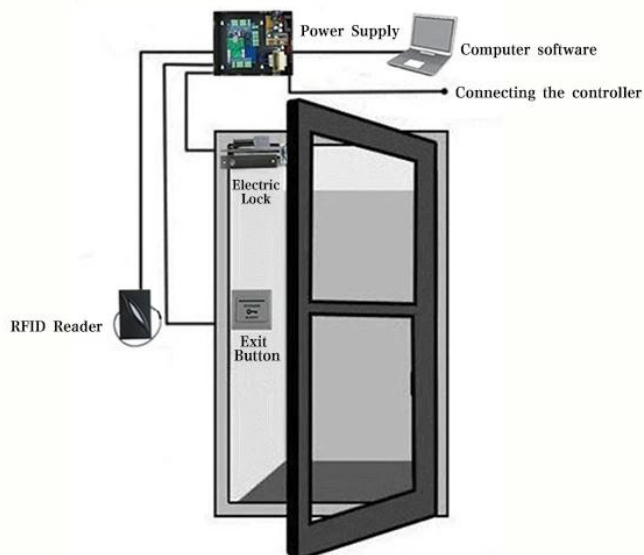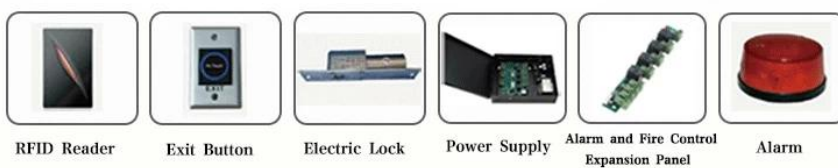

### Product Size

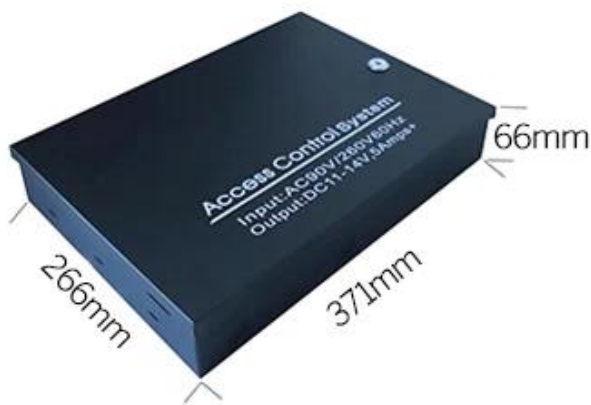

### Gift Box Size



### Carton Size



|         |              |
|---------|--------------|
| Packing | 10pcs/carton |
| Weight  | 23kg         |

Access control management software also includes an all-in-one card management system, such as the attendance management system for nominal and multiple shifts; fixed rations restaurant management system; Meeting attendance management system.

Conventional function: offline operation; real-time monitoring; to see photos; massive memory; flexible configuration for home users; remote unlock; multi-user supervision; quick setup, convenient control and inquiries; review and printable report form; OF MEMORY; the report can be exported to an Excel file; card unlock + password; alarm that does not close for a long time; invalid card offset alarm; unlock the first card; illegal attack alarm; release in defined time; e-map, etc.